



ZEBRA

8000T Low-Temp Gloss


FEATURES

- Thermal transfer, gloss polypropylene label with a cold-temp permanent acrylic adhesive
- Offers -112° F performance for low-temperature use; provides resistance to repeated freeze and thaw cycles
- Good smear/scratch and chemical resistance
- Very good resistance to dirt, blood, and water
- Good conformability to tight diameters
- Available in white (05973RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White gloss polypropylene	2.3 mil
Adhesive	Permanent, acrylic-based	0.7 mil
Liner	50 lb. semi-bleached, kraft stock	3.1 mil
TOTAL ± 10%		6.1 mil

ADHESIVE STRENGTH

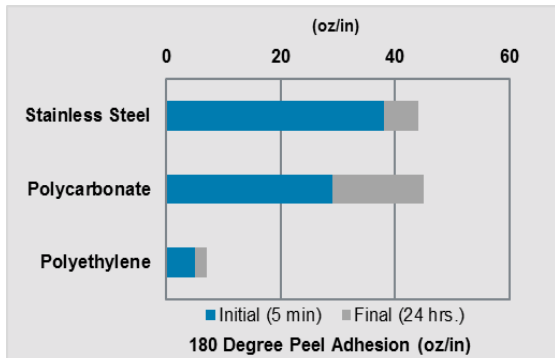

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-112° F to 200° F (-80° C to 93° C)	72° F (22° C) at 50% RH

Expected Exterior Life

1 year

CHEMICAL RESISTANCE

	Chemical	Suggested Ribbon	
		6200	5095
Weak	Blood	●	●
	Body Fluid	●	●
	Salt Water	●	●
	Water	●	●
	Window Cleaner	●	●
Moderate	Alcohol	●	●
	Ammonia	●	●
	Bleach	●	●
	IPA	●	●
Harsh	Gasoline	●	●
	Grease	●	●
	Oil	●	●
Extreme	Acetone	NR	NR
	IR Reflow	NR	NR
	MEK	NR	NR
	TCE	NR	NR
	Xylene	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Medical labs



- Hospitals



- Cold temp industrial/manufacturing applications



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.





8000T Low-Temp Gloss

Cold Temperature Testing Results:

Condition	Adhesive Durability	Maximum Flagging	Print Quality	Peel from vial (avg. oz/in)
Room temperature	No Change	1mm	No Change	31
Thermal Cycled Labels	No Change	1mm	No Change	26

Test Procedure:

Thermal cycled samples went through six freezing (-80C +/- 4C for 22 hours) and thawing (23 C +/- 2C) cycles. At the appropriate time, they were pulled every cycle for immediate inspection and one-hour room temperature testing. They were returned to the freezer two hours after being pulled for evaluation.

Cryogenic Vials:

5ml cryogenic vials from Nalgene Cryoware Catalog #5000-0050, Lot#311770 Vials filled with 2.5 ml of saline solution and capped.

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.





8000T Low-Temp Gloss

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

