



**ZEBRA**

# 8000T Piggyback Clear Matte


## FEATURES

- Thermal transfer, piggyback matte polyester label with a permanent acrylic adhesive
- Excellent print quality
- Special construction allows label to be printed and then laminated using the bottom clear portion
- Available in white top and clear bottom (05325RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White matte polyester	2.0 mil
Adhesive	Permanent, acrylic-based	0.9 mil
Facestock	Clear gloss polyester	1.5 mil
Adhesive	Permanent, acrylic-based	0.9 mil
Liner	50 lb. semi-bleached, kraft stock	3.2 mil
<b>TOTAL ± 10%</b>		<b>8.5 mil</b>

## ADHESIVE STRENGTH

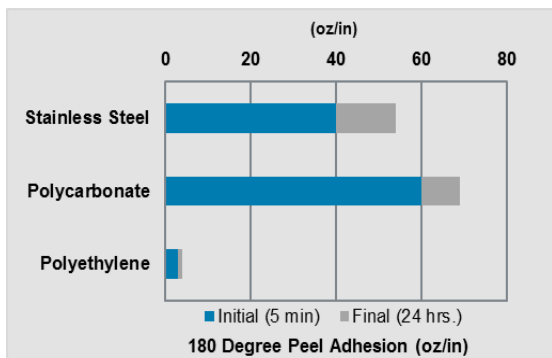

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-40° F to 302° F (-40° C to 150° C)	72° F (22° C) at 50% RH

## Expected Exterior Life

3 years

## CHEMICAL RESISTANCE

	Chemical	Suggested Ribbon		
		6000	2000	6100
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	●	●	●
	Ammonia	●	●	●
	Bleach	●	●	●
	IPA	●	●	●
Harsh	Gasoline	●	●	●
	Grease	●	●	●
	Oil	●	●	●
Extreme	Acetone	●	●	●
	IR Reflow	●	●	●
	MEK	●	●	●
	TCE	●	●	●
	Xylene	●	●	●

● Recommended ● Test in Your Application NR Not Recommended

## SUGGESTED APPLICATIONS

- UL compliance product labeling
- Compliance labeling
- Labeling of packaging material including corrugate, plastic, and metal
- Product identification
- Automotive labeling
- Laboratory slide labeling

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.





# 8000T Piggyback Clear Matte

## UL/CSA Acceptances:

8000T Piggyback Clear Matte with 3200 ribbon is UL-recognized on selected surfaces

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

