



**ZEBRA**

# 8000T Slide


## FEATURES

- Thermal transfer, premium, white gloss polyester label with a permanent acrylic adhesive
- Withstands immersion in harsh chemicals when paired with Image Lock™ ribbon
- Moderate abrasion resistance
- Prints well up to 6 in/sec
- Available in white (10027357RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White gloss coated polyester	3.0 mil
Adhesive	Permanent, acrylic-based	1.0 mil
Liner	50 lb. semi-bleached, kraft stock	3.1 mil
<b>TOTAL ± 10%</b>		<b>7.1 mil</b>

## ADHESIVE STRENGTH

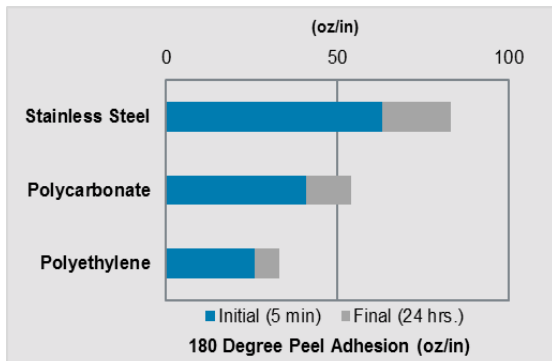

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-40° F to 257° F (-40° C to 125° C)	72° F (22° C) at 50% RH

**Expected Exterior Life**  
2 years

## SUGGESTED APPLICATIONS

- Laboratory slide labeling & staining processes



## CHEMICAL RESISTANCE

	Chemical	Suggested Ribbon Image Lock
Weak	Blood	●
	Body Fluid	●
	Salt Water	●
	Water	●
	Window Cleaner	●
Moderate	Alcohol	●
	Ammonia	●
	Bleach	●
	IPA	●
Harsh	Gasoline	●
	Grease	●
	Oil	●
Extreme	Acetone	●
	IR Reflow	●
	MEK	●
	TCE	●
	Xylene	●

● Recommended ● Test in Your Application NR Not Recommended

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

