



**ZEBRA**

# PolyO 4000T


## FEATURES

- Thermal transfer, highly flexible corona-treated polyolefin label with an all-temp permanent acrylic adhesive that provides high initial tack
- Some smear/scratch and chemical resistance
- Very good resistance to oil, alcohol, dirt, blood, and water
- Excellent conformability to tight diameters
- This material is suitable for fanfolding.
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (05139RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White corona treated polyolefin	4.0 mil
Adhesive	Permanent, acrylic-based	0.8 mil
Liner	50 lb. semi-bleached, kraft stock	3.2 mil
<b>TOTAL ± 10%</b>		<b>8.0 mil</b>

## ADHESIVE STRENGTH

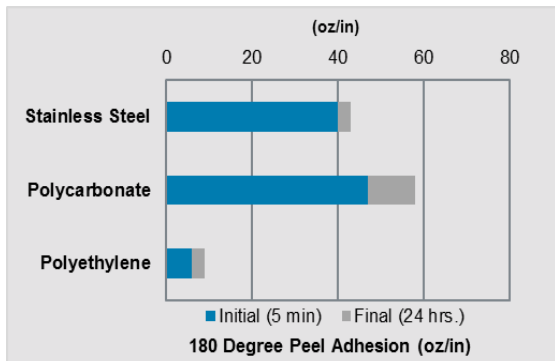

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
10° F (-12° C)	-40° F to 176° F (-40° C to 80° C)	72° F (22° C) at 50% RH

## EXPECTED EXTERIOR LIFE

6 months

## CHEMICAL RESISTANCE

Chemical		Suggested Ribbon	
		5586	6200
Weak	Blood	●	●
	Body Fluid	●	●
	Salt Water	●	●
	Water	●	●
	Window Cleaner	●	●
Moderate	Alcohol	●	●
	Ammonia	●	●
	Bleach	●	●
	IPA	●	●
Harsh	Gasoline	NR	NR
	Grease	NR	NR
	Oil	NR	NR
Extreme	Acetone	NR	NR
	IR Reflow	NR	NR
	MEK	NR	NR
	TCE	NR	NR
	Xylene	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

## SUGGESTED APPLICATIONS

- Labeling of packaging materials: corrugate, plastic, glass and metal



- Test tube labeling



- Chemical, medical, and drug labeling



- Cold temperature storage labeling



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

