



**ZEBRA**

# PolyPro 3000T Matte


## FEATURES

- Thermal transfer, matte polypropylene label with a permanent acrylic adhesive
- Good smear/scratch resistance
- Excellent conformability to tight diameters
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (65330RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White matte topcoated polypropylene	3.0 mil
Adhesive	Permanent, acrylic-based	1.0 mil
Liner	50 lb. semi-bleached, kraft stock	3.0 mil
<b>TOTAL ± 10%</b>		<b>7.0 mil</b>

## ADHESIVE STRENGTH

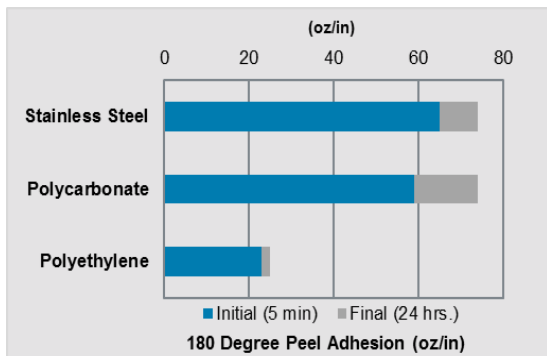

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
45°F (7°C)	-65°F to 200°F (-54°C to 80°C)	72° F (22° C) at 50% RH

### Expected Exterior Life

6 months

## CHEMICAL RESISTANCE

Chemical	Suggested Ribbon			
	6100	3200	6200	
<b>Weak</b>	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
<b>Moderate</b>	Alcohol	●	●	●
	Ammonia	●	●	●
	Bleach	●	●	●
	IPA	●	●	●
<b>Harsh</b>	Gasoline	●	●	●
	Grease	●	●	●
	Oil	●	●	●
<b>Extreme</b>	Acetone	●	●	●
	IR Reflow	●	●	●
	MEK	●	●	●
	TCE	●	●	●
	Xylene	●	●	●

● Recommended ● Test in Your Application NR Not Recommended

## SUGGESTED APPLICATIONS

- Package Labeling including corrugate, plastic, and metal



- Test tube labeling



- Indirect food labeling



For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

