



# Z-Perform 1500T


## FEATURES

- Thermal transfer, smooth paper label with a permanent acrylic adhesive
- Recommended for printing applications up to 14 inches per second
- Suitable for fanfolding
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (10017767RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White smooth topcoated paper	2.6 mil
Adhesive	Permanent, acrylic-based	0.6 mil
Liner	40 lb. semi-bleached, kraft stock	2.4 mil
<b>TOTAL ± 10%</b>		<b>5.6 mil</b>

## ADHESIVE STRENGTH

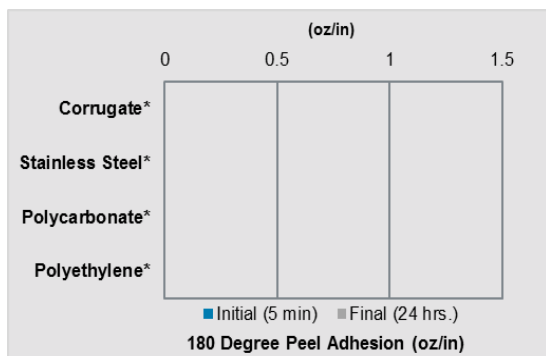

\*Attraction between adhesive and surface is so great that the facestock rips.

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
25° F (-4° C)	0° F to 180° F (-18° C to 82° C)	72° F (22° C) at 50% RH

### Expected Exterior Life

Not recommended for outdoor use

## CHEMICAL RESISTANCE

Chemical	Suggested Ribbon			
	6000	2000	6100	
<b>Weak</b>	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
<b>Moderate</b>	Alcohol	NR	NR	NR
	Ammonia	NR	NR	NR
	Bleach	NR	NR	NR
	IPA	NR	NR	NR
<b>Harsh</b>	Gasoline	NR	NR	NR
	Grease	NR	NR	NR
	Oil	NR	NR	NR
<b>Extreme</b>	Acetone	NR	NR	NR
	IR Reflow	NR	NR	NR
	MEK	NR	NR	NR
	TCE	NR	NR	NR
	Xylene	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

## SUGGESTED APPLICATIONS

- Labeling of packaging material



- Compliance labeling



- Work in process



- Food labeling



For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

