



**ZEBRA**

# Z-Select 4000D Removable


## FEATURES

- Direct thermal, premium, ultra smooth, paper label with a removable acrylic adhesive
- Excellent print quality
- Good scratch/smear resistance
- Not to be used in applications using chemicals
- Topcoating is suitable for fanfolding
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (65945RM)

## MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White smooth topcoated direct thermal paper	3.3 mil
Adhesive	Removable, acrylic-based	0.8 mil
Liner	40 lb. semi-bleached, kraft stock	2.4 mil
<b>TOTAL ± 10%</b>		<b>6.5 mil</b>

## ADHESIVE STRENGTH

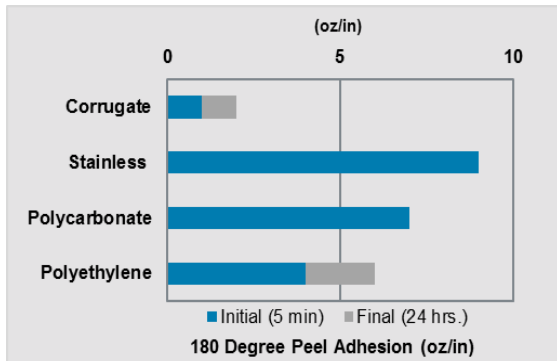

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
40° F (4° C)	-65° F to 140° F (-54° C to 60° C)	72° F (22° C) at 50% RH

### Expected Exterior Life

Not recommended for outdoor use

## CHEMICAL RESISTANCE

	Chemical	Direct Thermal
Weak	Blood	●
	Body Fluid	●
	Salt Water	●
	Water	●
	Window Cleaner	●
Moderate	Alcohol	NR
	Ammonia	NR
	Bleach	NR
	IPA	NR
Harsh	Gasoline	NR
	Grease	NR
	Oil	NR
Extreme	Acetone	NR
	IR Reflow	NR
	MEK	NR
	TCE	NR
	Xylene	NR

● Recommended ● Test in Your Application NR Not Recommended

## SUGGESTED APPLICATIONS

- Labeling of packaging materials



- Work in process



- Food labeling



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchases of

